

Features and Benefits

The SLT3 Tester provides instant identification of most common voice and data cabling problems including shorts, opens, reversals, and miswires.

The master and remote units separate for end-to-end testing of installed cabling. Shorts, opens, reversals, or miswires are easily detected within seconds—the continuously sequencing LED display immediately alerts you to problems in the cabling system. Both pieces simply snap and lock together when not in use, making it easy to carry and store. When the units are interlocked, the battery is disabled, thus prolonging battery life.

Designed to fit into a tool box or pocket, the SLT3 Tester has a convenient “ring” feature for attaching to a belt or frame. A durable nylon carry case may be purchased as an optional accessory. Frame adapters are available for testing from the punch down block to the wall plate in one simple operation.

Reference Information

Parts List for SLT3 Single Line Tester
 SLT3 Single Line Tester (1 Remote and 1 Master unit)
 Instructions

Optional Items

Carry Case

Accessory Kit includes:

Carry Case

2 8W Line Cords

2 Frame Adapters (KATT 568A and KATT 568B)

1 RJ11-RJ45 Adapter

Technical Information

Mechanical Characteristics

Material: Thermoplastic
 UL94V-0

Power Requirements: 9V Alkaline
 Battery (included)

Max Distance: 10,000 ft.

Interface: USOC, 568A and 568B



Mating: 4W, 6W, 8W and 8W-keyed plugs

Contact Material: 50 μinches gold over 100 μinches nickel

SLT3 Single Line Tester
 Set Dimensions:
 146mm x 58mm x 38mm
 (5.75”H x 2.3”W x 1.5”D)
 Shipping Weight: 224g (8 oz.)

Master Dimensions:
 109mm x 58mm x 38mm
 (4.3”H x 2.3”W x 1.5”D)
 Shipping Weight: 140g (5 oz.)

Remote Dimensions:
 109mm x 58mm x 38mm
 (4.3”H x 2.3”W x 1.5”D)
 Shipping Weight: 84g (3 oz.)

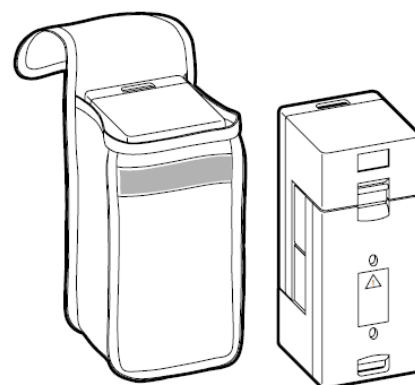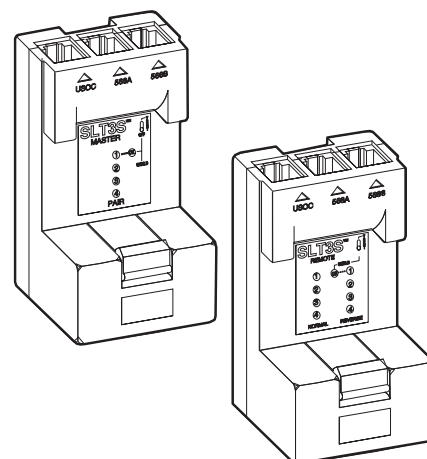

Demonstration of mated SLT3 Tester with Carry Case

ORDERING INFORMATION

Order No.	SAP No.	Description
33-100	Consult Molex	SLT3 Single Line Tester
33-100-P	Consult Molex	SLT3 Carry Case
33.B0010	Consult Molex	SLT3 Accessory Kit—includes Carry Case, two 8-wire line cords, two frame adapters (KATT 568A and KATT 568B) and one RJ11-RJ45 Adapter. SLT3 Not Included.
33.B0020	Consult Molex	SLT3 Tester with Carry Case

MOLEX PREMISE NETWORKS

Americas
 Tel: 630 969 4550
 www.molexpn.com

EMEA
 Tel: 44 (0)2392 205800
 www.molexpn.co.uk

APAC
 Tel: 61 3 9971 7111
 www.molexpn.com.au